

Referans Nr.	d x L	b1	b	(g)
1690-08040	x40		20	10
1690-08063	x63		40	15
1690-08080	x80		50	20
1690-08100	x100		63	30
1690-08125	x125		75	35
1690-08160	x160		100	45
1690-10050	x50		25	20
1690-10063	x63		32	25
1690-10080	x80		50	35
1690-10100	x100		63	45
1690-10125	x125		75	55
1690-10160	x160		100	70
1690-10200	x200		125	95
1690-12050	x50		25	35
1690-12063	x63		32	40
1690-12080	x80		50	55
1690-12100	x100		63	70
1690-12125	x125		75	90
1690-12160	x160		100	115
1690-12200	x200		125	140
1690-14063	x63		32	60
1690-14080	x80		50	75
1690-14100	x100		63	95
1690-14125	x125		75	120
1690-14160	x160		100	150
1690-14200	x200		125	195
1690-14250	x250		160	240
1690-16063	x63		32	85
1690-16080	x80		50	105
1690-16100	x100		63	130
1690-16125	x125		75	160
1690-16160	x160		100	205
1690-16200	x200		125	260
1690-16250	x250		160	325
1690-16315	x315		180	405
1690-16500	x500		315	650
1690-18080	x80		50	130
1690-18100	x100		60	160
1690-18125	x125		75	200
1690-18160	x160		100	260
1690-18200	x200		125	320
1690-18250	x250		150	400
1690-18315	x315		180	510
1690-20080	x80		32	155
1690-20100	x100		60	200
1690-20125	x125		70	250
1690-20160	x160		100	330
1690-20200	x200		125	400
1690-20250	x250		160	510
1690-20315	x315		200	640
1690-20400	x400		250	815
1690-20500	x500		315	1020
1690-22100	x100		45	250
1690-22125	x125		70	305
1690-22160	x160		100	400
1690-22200	x200		125	500
1690-22250	x250		160	620
1690-22315	x315		180	780
1690-22400	x400		250	1010
1690-24100	x100		45	290
1690-24125	x125		70	365
1690-24160	x160		100	470
1690-24200	x200		125	580
1690-24250	x250		160	730
1690-24315	x315		200	920
1690-24400	x400		250	1170
1690-24500	x500		315	1470
1690-24630	x630		315	1860
1690-30125	x125		56	570
1690-30200	x200		125	910
1690-30250	x250		160	1150
1690-30315	x315		200	1435
1690-30500	x500		315	2315
1690-30700	x700		400	3215
1690-301000	x1000		400	4700

Referans Nr.	d x L	b1	b	(g)
1690-36160	x160		80	1100
1690-36200	x200		125	1340
1690-36250	x250		160	1710
1690-36315	x315		200	2150
1690-36400	x400		250	2700
1690-36500	x500		315	3450
1690-36700	x700		400	4750
1690-42315	x315		200	2950
1690-42400	x400		250	3750
1690-42500	x500		315	4690


DIN 6379

Ürün Nr. 1690 Düz Saplama

- Malzeme: 41Cr 4 DIN
- Kalite 10.9
- Siyah kaplama

Product Nr. 1690 Straight Stud

- Material: 41Cr 4 DIN
- Quality 10.9
- Black coating

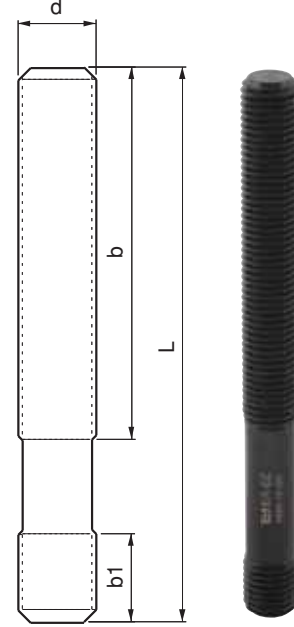

Not: 150 °C üzerindeki ortamlarda sıkma işlemi yapılırken dişlerin üzerine Loctite 8150 kullanılır.

Note: Environments on the 150 °C when clamping action on the thread Loctite 8150 is used.

