

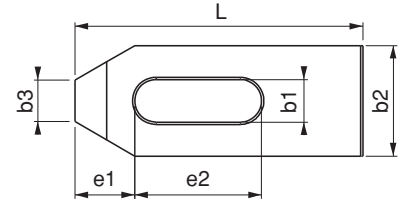

Referans Nr.	L	b1	metrik	whitworth	a	b2	b3	e1	e2	(g)
1290-06050	50	6.6	M6	1/4	10	20	8	10	20	50
1290-06080	80								30	95
1290-08060	60	9	M8	5/16	12	25	10	13	22	100
1290-08100	100								45	170
1290-10080	80	11	M10	3/8	15	30	12	15	30	190
1290-10100	100								45	225
1290-12100	100	14.5	M12-M14	1/2	20	40	14	21	45	435
1290-12125	125								55	580
1290-16125	125	18.5	M16-M18	5/8	25	50	18	26	55	855
1290-16160	160								65	1175

Ürün Nr. 1290 Merdiven Dış Bağlama Pabucu

- 1310 Nr. Merdiven destek ile kullanılır
- Malzeme Ck45 DIN
- Sertlik 32-40 HRC
- Siyah Kaplama

Product Nr. 1290 Serrated Thread Clamp

- Product is used with No. 1310 Serrated Support
- Material: Ck45 DIN
- Hardness: 32-40 HRC
- Black Coating


Merdiven Dış Destek

Serrated Thread Support

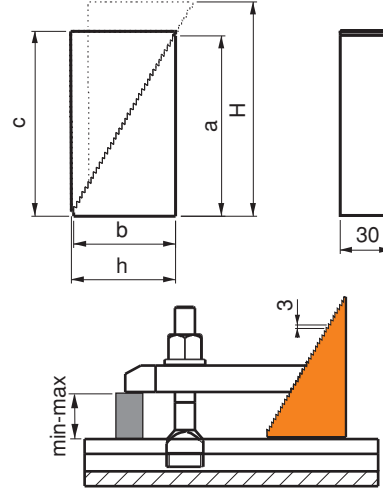
Referans Nr.	h-H	a	b	c	min-max	(g)
1310-01	37-85	57	35	60	0-40	505
1310-02	48-112	73	45	76	0-60	825
1310-03	58-139	90	55	93	0-75	1250
1310-04	66-165	108	64	111	0-90	685

Ürün Nr. 1310 Merdiven Dış Destek

- 1290 Nr. Merdiven dış pabuç ile kullanılır
- Malzeme: Ck45 DIN
- Siyah Kaplama

Product Nr. 1310 Serrated Thread Support

- Product is used with No. 1290 Serrated Thread Clamp
- Material: Ck45 DIN
- Black Coating



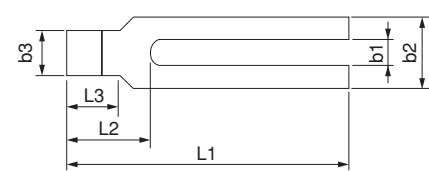

Referans Nr.	b1	L1	metrik	whitworth	a	b2	b3	L2	L3	(g)
1320-08100	9	100	M8	5/16	15	30	16	32	18	240
1320-10125	11	125	M10	3/8	20	30	20	38	24	380
1320-12160	14.5	160	M12-M14	1/2	25	40	24	47	30	800
1320-12200	14.5	200	M12-M14	1/2	25	40	24	47	30	950
1320-16200	18.5	200	M16-M18	5/8	30	50	28	57	36	1500
1320-16250	18.5	250	M16-M18	5/8	30	50	28	57	36	1850
1320-20250	22.5	250	M20-M22	3/4	40	60	35	68	45	2900
1320-20315	22.5	315	M20-M22	3/4	40	60	35	68	45	3600
1320-24250	26	250	M24	1	40	70	43	83	56	3400
1320-24315	26	315	M24	1	40	70	43	83	56	4300
1320-30315	33	315	M30	1 1/4	50	80	50	88	56	6000
1320-30400	33	400	M30	1 1/4	50	80	50	88	56	7300

Ürün Nr. 1320 Çatal Pabuç

- Malzeme: Ck45 DIN
- Sertlik: 32-40 HRC
- Siyah Kaplama

Product Nr. 1320 Bifurcated Clamp

- Material: Ck45 DIN
- Hardness: 32-40 HRC
- Black Coating


Çatal Pabuç

Bifurcated Clamp