




HSK İNCE TİP TUTUCULAR

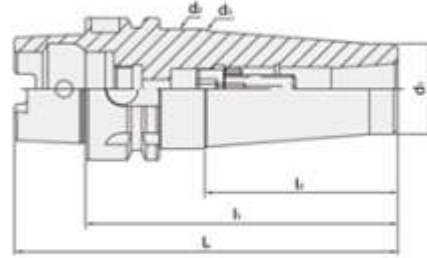

- Every tool holder reaches the revolution of G2.5 25,000 rpm, with an inspection report.
- The balancing grade and revolution can be done according to customer request but the additional charge is needed.

MODEL NO.	TYPE - I1	L	l2	d1	d2	d3	T
35456H	HSK50A x HBL12 - 110	135	68	31.75	42	40.79	M10 x 1.5P
35458H	HSK50A x HBL12 - 130	155	75.12	31.75	42	-	M10 x 1.5P
35460H	HSK50A x HBL20 - 120	145	54.66	38.1	42	-	M12 x 1.75P
35462H	HSK50A x HBL20 - 150	175	54.45	38.1	42	-	M12 x 1.75P
35476H	HSK63A x HBL12 - 110	142	79.22	31.75	37.79	-	M10 x 1.5P
35478H	HSK63A x HBL12 - 150	182	119.22	31.75	41.29	-	M10 x 1.5P
35480H	HSK63A x HBL20 - 120	152	89.22	38.1	45.02	-	M12 x 1.75P
35482H	HSK63A x HBL20 - 140	172	111.13	38.1	45	-	M12 x 1.75P
35494H	HSK100A x HBL12 - 120	170	79.05	31.75	37.78	-	M10 x 1.5P
35496H	HSK100A x HBL20 - 135	185	89.02	38.1	45	-	M12 x 1.75P
35498H	HSK100A x HBL25 - 150	200	118.13	44.45	53.89	-	M24 x 1.5P