




PSC İNCE TİP TUTUCULAR

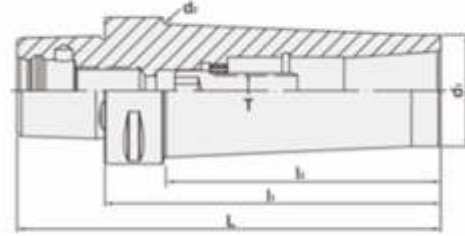

- Every tool holder reaches revolution of G2.5 25,000 rpm, with an inspection report.

MODEL NO.	TYPE	L	l1	l2	d1	d2	T
140.275.12.090	PSC32 x HBL12 - 90	109	90	75	31.75	32	M10 x 1.5P
141.275.12.090	PSC40 x HBL12 - 90	114	90	68.4	31.75	36.85	M10 x 1.5P
141.275.20.105	PSC40 x HBL20 - 105	129	105	85	38.1	40	M12 x 1.75P
142.275.12.105	PSC50 x HBL12 - 105	135	105	82.1	31.75	38.04	M10 x 1.5P
142.275.20.115	PSC50 x HBL20 - 115	145	115	94.04	38.1	45.3	M12 x 1.75P
142.275.25.120	PSC50 x HBL25 - 120	150	120	100	44.45	50	M16 x 2.0P
143.275.12.100	PSC63 x HBL12 - 100	138	100	69.9	31.75	36.9	M10 x 1.5P
143.275.20.120	PSC63 x HBL20 - 120	158	120	91.4	38.1	45.2	M12 x 1.75P
143.275.25.120	PSC63 x HBL25 - 120	158	120	92.6	44.45	51.6	M16 x 2.0P