




# D Delik İşleme Katerleri

## IR(L)H

(Vidalı Bağlama Sistemi)

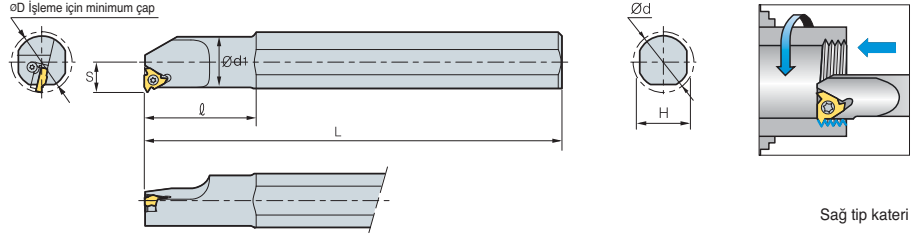


Sağ tip kateri  
(mm)

Kod	İç Teğet Çapı	ØD	Ød	Ød1	H	L	S	ℓ	Kesici Uç Vidası	Altık Vidası	Vida (Sağ)	Vida (Sol)	Anahtar
IR(L)H 10DN-11	6.35	13	10	10.0	9.5	100	7.3	-	ST11N	-	-	-	TW08P
10N-11	6.35	13	20	10.0	18.0	180	7.3	25		-	-	-	TW08P
13N-11	6.35	16	20	13.0	18.0	180	8.9	32		-	-	-	TW08P
13N-16	9.525	17	20	12.7	18.0	180	10.3	32	ST16N	-	-	-	TW10P
16N-16	9.525	20	20	16.0	18.0	180	11.5	40		-	-	-	TW10P
16DN-16	9.525	20	16	16.0	15.2	150	11.3	32		-	-	-	TW10P
20-16	9.525	24	20	20.0	18.0	180	13.4	40	ST16	STA16	ATI16	ATE16	TW10P
25-16	9.525	29	32	25.0	29.0	250	16.3	60		-	-	-	TW10P
25D-16	9.525	29	25	24.5	22.6	200	16.1	45		-	-	-	TW10P
32-16	9.525	36	32	32.0	29.0	250	19.6	60	ST22N	-	-	-	TW20P
40-16	9.525	44	40	40.0	36.0	300	23.8	60		-	-	-	TW20P
20N-22	12.7	27	20	20.0	18.0	180	15.6	50		-	-	-	TW20P
25-22	12.7	32	32	25.0	29.0	250	17.4	60	ST22	STA22	ATI22	ATE22	TW20P
25D-22	12.7	32	25	24.6	22.6	200	17.2	45		-	-	-	TW20P
32-22	12.7	39	32	32.0	29.0	250	21.5	60		-	-	-	TW20P
40-22	12.7	47	40	40.0	36.0	300	25.8	60	ST27	STA27	ATI27	ATE27	TW25L
32-27	15.875	40	32	32.0	29.0	250	22.4	60		-	-	-	TW25L
40-27	15.875	48	40	40.0	36.0	300	26.4	60		-	-	-	TW25L
50-27	15.875	58	50	50.0	45.0	350	31.4	75	ST27	STA27	ATI27	ATE27	TW25L
60-27	15.875	69	60	60.0	54.0	400	36.4	75		-	-	-	TW25L

↻ Kullanılabilir kesici uçlar için sayfa D10, D11, D14, D15, D17, D20~D25, D27~D30 • Bütün katerler için Helis açısı 1.5° • N tip katerlerde altığa gerek yoktur

## IR(L)H-C

(Baskılı Bağlama Sistem)

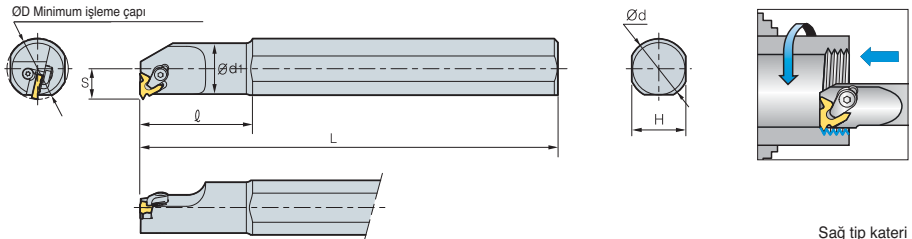

Sağ tip kateri  
(mm)

Kod	İç Teğet Çapı	ØD	Ød	Ød1	H	L	S	ℓ	Altık Vidası	Baskı Parçası	Vida (Sağ)	Vida (Sol)	Anahtar
IR(L)H 20-16C	9.525	24	20	20.0	18.0	180	13.4	50	STA16	CTH16	ATI16	ATE16	TW10P
25-16C	9.525	29	32	25.0	28.0	250	16.3	60					TW15P
25D-16C	9.525	29	25	24.6	22.6	200	16.1	45					TW15P
32-16C	9.525	36	32	32.0	29.0	250	19.6	60	STA22	CTH22	ATI22	ATE22	TW20P
40-16C	9.525	44	40	40.0	36.0	300	23.8	60					TW20P
25-22C	12.7	32	32	25.0	29.0	250	17.4	60					TW20P
25D-22C	12.7	32	25	24.6	22.6	200	17.2	45	STA27	CTH27	ATI27	ATE27	TW25L
32-22C	12.7	39	32	32.0	29.0	250	21.5	60					TW25L
40-22C	12.7	47	40	40.0	36.0	300	25.8	60					TW25L
32-27C	15.875	40	32	32.0	29.0	250	22.4	60	STA27	CTH27	ATI27	ATE27	TW25L
40-27C	15.875	48	40	40.0	36.0	300	26.4	60					TW25L
50-27C	15.875	58	50	50.0	45.0	350	31.4	75	STA27	CTH27	ATI27	ATE27	TW25L
60-27C	15.875	69	60	60.5	54.0	400	36.4	75					TW25L

↻ Kullanılabilir kesici uçlar için sayfa D10, D11, D14, D15, D17, D20~D25, D27~D30 • Tüm takımlar için helis açısı 1.5 derecedir



D

Diş Çekme

32