


F Kaynaklı Parmak Frezeler

ZSBE200 (Küresel)

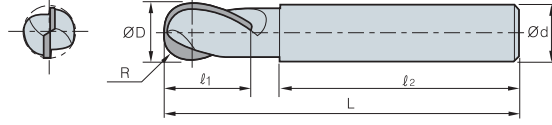

ØD	Tolerans
Tüm	0.00~-0.05

(mm)

Kod	R	ØD	Ød	ℓ1	ℓ2	L
ZSBE 213	6.5	13	16	30	60	100
214	7	14	16	30	65	100
215	7.5	15	16	35	55	100
216Q	8	16	16	35	55	100
217	8.5	17	20	35	65	110
218	9	18	20	35	65	110
219	9.5	19	20	35	65	110
220Q	10	20	20	35	65	110
221	10.5	21	20	35	65	110
222	11	22	20	35	65	110
223	11.5	23	25	40	65	120
224	12	24	25	40	70	120
225	12.5	25	25	40	70	120
230	15	30	32	40	70	130
231	15.5	31	32	40	80	130
232	16	32	32	50	75	140
233	16.5	33	32	50	75	140
234	17	34	32	50	85	150
235	17.5	35	32	50	85	150
235S	17.5	35	42	50	85	150
236	18	36	32	50	85	150
236S	18	36	42	50	85	150
237	18.5	37	32	50	95	160
237S	18.5	37	42	50	95	160
238	19	38	32	50	95	160
238S	19	38	42	50	95	160
239	19.5	39	32	50	95	160
239S	19.5	39	42	50	95	160
240	20	40	32	50	95	160
240S	20	40	42	50	95	160
245	22.5	45	32	50	105	170
245S	22.5	45	42	50	105	170
250	25	50	32	50	105	170
250S	25	50	42	50	105	170

• ZSBE200

Özel Parmak Freze Siparişi: ZSBE200-I-L
 Örn.1) 2 kanallı, çap: 6.3 l: 10 L: 60 ZSBE 206310-60L
 Örn.2) 2 kanallı, çap: 6.3, Standart Tip ZSBE2063

• ZSEA200

Özel Parmak Freze Siparişi : ZSEA200-I-L
 Örn.1) 2 kanallı, çap: 16.3, l:28, L:95 ZSEA2163 28-95L
 Örn.2) 2 kanallı, çap: 17.0, Standart Tip ZSEA2170

• ZSEL200/400, ZSEXL200

Özel Parmak Freze Siparişi: ZSEL200-I-L



F Parmak Frezeler

108