

PCD Reamer


Kod sistemi



Önerilen kesme koşulu

İş parçası	vc (m/dak)	fn (mm/dev)
Alüminyum alaşımları	50~250	0.05~0.20

PCD Reamer-PDR

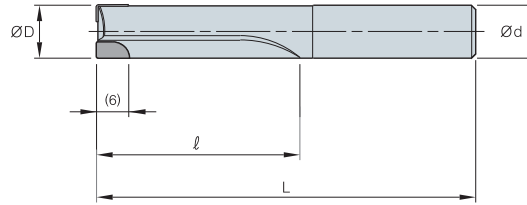

(mm)							
Kod	Ağız sayısı	ØD	Ød	l	L		
PDR	2050	2	5.0	6.0	30	65	
	2060	2	6.0	6.0	40	75	
	2070	2	7.0	8.0	40	75	
	2080	2	8.0	8.0	40	75	
	2090	2	9.0	10.0	40	85	
	2100	2	10.0	10.0	40	85	
	2120	2	12.0	12.0	50	95	
	2140	2	14.0	16.0	50	95	
	2150	2	15.0	16.0	50	100	
	4160	4	16.0	16.0	50	100	
	4180	4	18.0	20.0	60	110	
	4200	4	20.0	20.0	60	110	