


Indexable Reamer-IRB

Kör delik

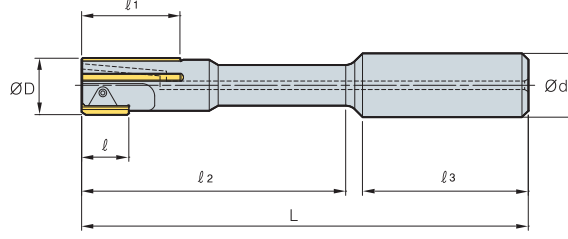

(mm)

Kod	ØD	l	l ₁	l ₂	l ₃	L	Ød	Kesici Uç
IRB 10.000-16125-15	10	15	30	75	45	125	16	RI 15
11.000-16125-15	11	15	30	75	45	125	16	RI 15
12.000-16135-16	12	16	30	85	45	135	16	RI 16
13.000-16135-16	13	16	30	85	45	135	16	RI 16
14.000-16135-16	14	16	30	85	45	135	16	RI 16
15.000-16135-16	15	16	30	85	45	135	16	RI 16
16.000-20155-16	16	16	30	100	50	155	20	RI 16
17.000-20155-16	17	16	30	100	50	155	20	RI 16
18.000-20155-17	18	17	30	100	50	155	20	RI 17
19.000-20155-17	19	17	30	100	50	155	20	RI 17
20.000-25165-17	20	17	30	110	56	165	25	RI 17
21.000-25165-17	21	17	30	110	56	165	25	RI 17
22.000-25165-17	22	17	30	110	56	165	25	RI 17
23.000-25165-17	23	17	30	110	56	165	25	RI 17
24.000-25165-17	24	17	30	110	56	165	25	RI 17
25.000-25165-17	25	17	30	110	56	165	25	RI 17
26.000-25165-17	26	17	30	110	56	165	25	RI 17
27.000-25165-17	27	17	30	110	56	165	25	RI 17
28.000-32165-22	28	22	30	110	56	165	32	RI 22
29.000-32165-22	29	22	30	110	56	165	32	RI 22
30.000-32165-22	30	22	30	110	56	165	32	RI 22
31.000-32165-22	31	22	30	110	56	165	32	RI 22

➔ Kullanılabilir Kesici Uçlar **G82**