




AKİFSAN
MAK. HIRD. SAN. TİC. LTD. ŞTİ.

Özkayalı®




Hassas döner boru puntası

Precision rotary pipe centers

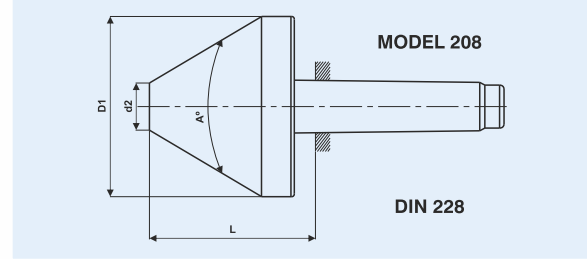

Sipariş Kodu	Mors Konik / MK	Ölçüler / Dimensions				Uç Salgısı	Ağırlık (kg.)
Order Code		D1	A	d2	L	Center Runout	Weight
B70	3	80	60°	26	70	0.008	2.5
B80	4	80	60°	26	71	0.008	2.8
B90	3	100	60°	28	84	0.008	3.9
B100	4	100	60°	28	86	0.008	4.2
B110	4	120	60°	38	89	0.008	5.8
B120	5	120	60°	38	97	0.008	6.5
B130	4	140	60°	45	104	0.01	8
B140	5	140	60°	45	108	0.01	8.8
B150	5	170	70°	58	121	0.01	13
B160	5	200	70°	65	134	0.01	19
B170	6	200	70°	65	126	0.01	22
B175	5	255	70°	150	114	0.01	36
B180	6	255	70°	150	115	0.01	39
B185	5	355	70°	150	139.5	0.01	67
B195	6	355	70°	150	168	0.01	70

MODEL 208

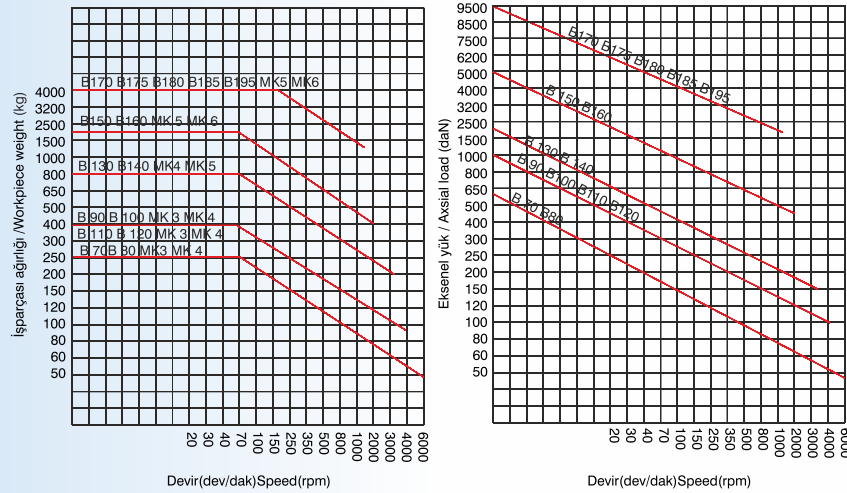

Örnek: 250 Dev/dak. ile dönen MK5 puntanın taşıya bileceği yük değeri;
Radyal yük : 1700 kg
eksenel yük: 1200 daN

Example : Load value that rotary MK5 center could carry with 250 revolution/min
Radial road : 1700 Kg
Axial Load : 1200 daN