



Referans Nr.			Sıkma kuvveti Clamping force kgf	L	m	n	(g)
2020-120125	M12	14-16-18	1500	125	20	15	1414
2020-120250	M12		1500	250	20	15	1528
2020-120500	M12		1500	500	20	15	1755
2020-121000	M12		1500	1000	20	15	2210
2020-160125	M16	18-20-22-24	4000	125	33	21	3495
2020-160250	M16		4000	250	33	21	3810
2020-160500	M16		4000	500	33	21	4480
2020-161000	M16		4000	1000	33	21	5820

Ürün Nr. 2020 Zincirli Sıkma

- Silindirik ve oval iş parçalarının bağlanabilmesi için tasarlanmıştır.
- Malzeme: 42 CrMo 4 DIN
- Sertlik: 40-42 HRC
- Siyah kaplama

Product Nr. 2020 Fixture Chain

- It is designed for clamping of cylinder and oval workpieces.
- Material: 42 CrMo 4 DIN
- Hardness: 40-42 HRC
- Black coated

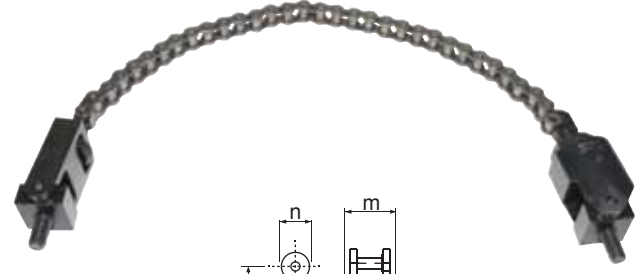


Referans Nr.		a	b	c	e1	f1	h1 min.	h1 max.	m	s1	Sıkma kuvveti Clamping force kgf	(g)
2020-12125	14-16-18	36	36	18	49	21	95	125	M12	35	1500	580
2020-16162	18-20-22-24	37	44	25	64	29	117	162	M16	45	4000	1275

Ürün Nr. 2020 Ayar Ünitesi

- Malzeme: 42 CrMo 4 DIN
- Sertlik: 40-42 HRC
- Siyah kaplama

Product Nr. 2020 Setting Unit

- Material: 42 CrMo 4 DIN
- Hardness: 40-42 HRC
- Black coated

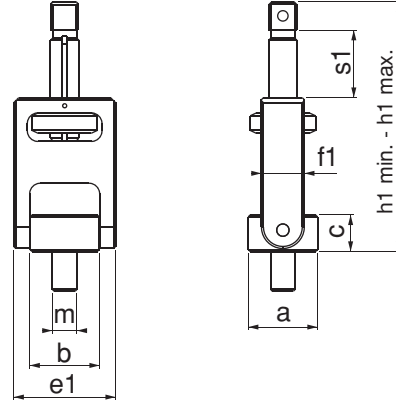

Ayar Ünitesi

Setting Unit




Referans Nr.		a	b	c	e2	f2	h2 min.	h2 max.	s2	SW	m	Sıkma kuvveti Clamping force kgf	(g)
2020-12127	14-16-18	36	36	18	54	49	111	127	16	36	M12	1500	945
2020-16170	18-20-22-24	37	44	25	70	62	140	170	30	46	M16	4000	1890

Ürün Nr. 2020 Kanca Ünitesi

- Malzeme: 42 CrMo 4 DIN
- Sertlik: 40-42 HRC
- Siyah kaplama

Product Nr. 2020 Hook Unit

- Material: 42 CrMo 4 DIN
- Hardness: 40-42 HRC
- Black coated

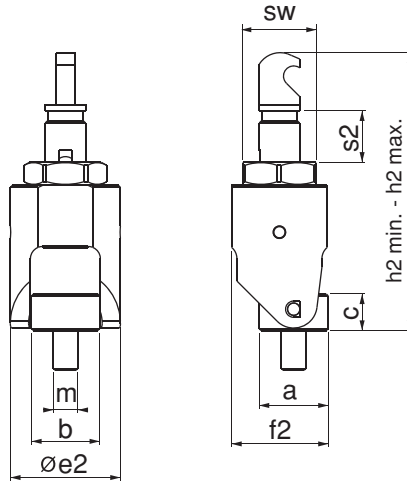

Kanca Ünitesi

Hook Unit

